

STAINLESS STEEL THREE-PIECE, ECONOMICAL


BV2 - 3 F - 1/2" - 4" BSP/NPT

FEATURES

- Blow-out proof stem
- Stainless steel ball and stem are standard
- Precision investment cast body and caps
- Easy installation with wide selection of end fittings
- Three-piece swing-out design allows in-line maintenance
- Full port orifice minimizes pressure drop across the pipeline
- Self-adjusting floating ball enables tight internal seal



PRESSURE/TEMPERATURE CHART

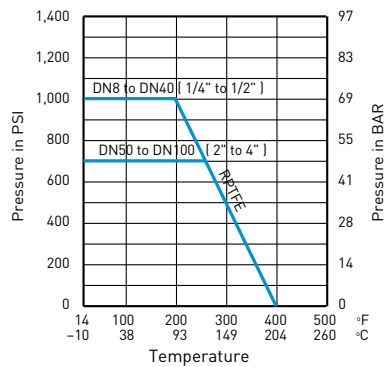

DIMENSIONS (MM)

SIZE	DN	M	H	L	L1	ØDN	ØM3	ØN1	ØN2	ØN3
1/2"	8	103	54	61	61	11.6	18.0	NPT	14.2	11.6
3/8"	10	103	54	61	61	12.5	18.0		17.7	12.5
1/2"	15	133	55	69	69	15.0	22.7		21.9	17.0
3/4"	20	133	59	78	78	20.0	22.7	or	27.2	22.5
1"	25	153	70	84	84	25.0	33.5	BSPT	33.9	26.0
1 1/4"	32	153	75	104	104	32.0	42.2		42.7	34.4
1 1/2"	40	191	84	118	119	38.5	48.8		48.8	41.5
2"	50	191	92	129	131	50.0	61.0	or	61.3	53.0
2 1/2"	65	247	128	162	162	65.0	77.0	BSPP	74.2	65.8
3"	80	247	137	182	182	80.0	91.0		90.0	81.0
4"	100	295	173	230	230	100.0	115.0		115.6	102.0

